


# EX200 Caller ID Converter

## Main Features:

- Convert DTMF caller ID format to Bellcore type I format
- Convert ETSI FSK type I caller ID format to Bellcore type I format
- Time/Date Setting
- Time/Date Stamp when DTMF caller ID
- Line powered

- If the time/date has not been set yet, each caller ID data will stamp "00/00 00:00" on time field and "PLEASE SET UP" on name field.
- As the power is supplied by telephone line. If the unit is unplugged from the telephone line, the setting will be lost. If this happens, please set up again.

## Connection

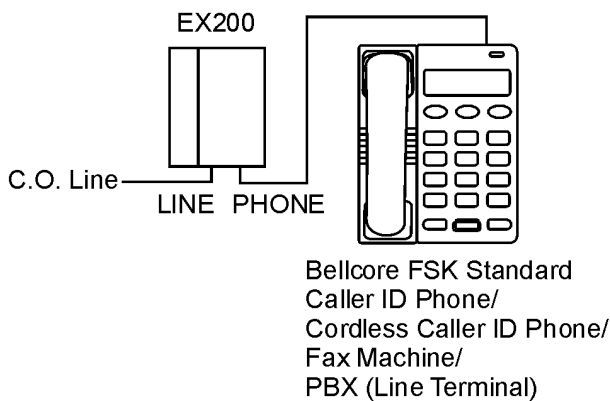

Plug telephone line to LINE jack of EX200, and the caller ID phone on the PHONE jack.

The power is supplied by telephone line, so no need to install any battery or other external power source.

## Setting up the date and clock

If the caller ID standard is DTMF, then the data sent by telephone company includes only caller's number. In order to record date and time of each call, you must set up current date and time. After setting date and time, each caller ID will have time/date stamp.

Setting procedure:

1. Lift the handset of your caller ID phone
  2. Key in #3#MMDDhhmm\*# from the dial pad
    - MM=month (01-12)
    - DD=day (01-31)
    - hh=hour (00-23)
    - mm=minute (00-59)e.g. for setting July 12<sup>th</sup>, 2:35pm, press #3#07121435\*#
  3. Hang up the handset
  4. Lift the handset again, and press REDIAL button. When you hear a BEEP sound, the setting is completed.
- During the setting, you may hear some announcement from the telephone company, please ignore the announcement and complete dialing all digits.